

## AIR QUALITY TRANSMITTER/CONTROLLER ILH

ILH transmitters are designed for detecting and controlling VOC (Volatile Organic Compound) level, temperature and humidity in dry room spaces. MEMS sensing technology ensures accurate and durable VOC measurement that is related to the CO<sub>2</sub> level. With the VOC level information the demand based ventilation can be controlled effectively.

The VOC sensor detects wide variety of hydrocarbons such as cigarette smoke, exhaled breathing air, solvent vapours, building material emissions and cleaning agent vapours.

The measurement values scroll on the N model display. The wanted value can be locked to view continuously.

The control output can be controlled either according to a one measurement value or according to the maximum selection of all values. The controller settings can be changed by using the ML-SER tool.

The transmitter can be equipped with following options:


- HD-AL3 (not available for N models): VOC level indicator lights (3 pcs). As a factory setting, the lights are illuminated as follows:
  - Green: 450...750 ppm
  - Yellow: 751...1250 ppm
  - Red: 1251...2000 ppm

The indicator light limits can be changed by using the ML-SER tool.

- HD-P: Passive potentiometer
- HD-PU: Active 0...10 V potentiometer
- HD-R: Relay (24 Vac, 1 A) that switches according to the one measurement value or according to the all values. The relay switching point can be adjusted by using ML-SER tool.

See more information about options from the ILH order form.

### Wiring:

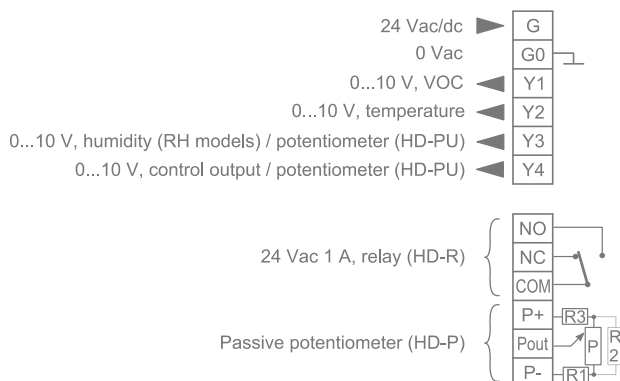

### Technical data

Supply	24 Vac/dc (22...28 V), < 2 W
VOC measurement	
range	450...2000 ppm (CO <sub>2</sub> equivalent)
warm up time	15 min
output	0...10 V < 2 mA = 0...2000 ppm
Temperature measurement	
range	0...50 °C
accuracy (25 °C)	±0.5 °C
output	0...10 V < 2 mA = 0...50 °C
Humidity measurement (RH models)	
range	0...100 %rH
accuracy (25 °C)	±2 %rH
output	0...10 V < 2 mA = 0...100 %rH
Controller output	0...10 V < 2 mA
Operating temperature	0...+50 °C
Ambient humidity	0...85 % RH (non cond.)
Housing	IP20, ABS plastic
Mounting	on the wall surface or on the standard flush mounting box (60 mm hole distance)
Dimensions (w x h x d)	87 x 86 x 30 mm

### Ordering guide:

Model	Product number	Description
ILH	1135610	VOC and °C room transmitter
ILH-N	1135611	room transmitter with display
ILH-RH	1135612	VOC, °C and %rH room transmitter
ILH-RH-N	1135613	room transmitter with display
HD-P	1135001	option, passive potentiometer
HD-PU	1135002	option, 0...10 V potentiometer
HD-R	1135003	option, relay 24 Vac 1 A
HD-AL3	1135048	option, indicator lights, 3 pcs
ML-SER	1139010	transmitter commissioning tool

Products fulfil the requirements of directive 2004/108/EC and are in accordance with the standards EN61000-6-3: 2001 (Emission) and EN61000-6-2: 2001 (Immunity).