

FIRE ALARM THERMOSTAT PVA 24

APPLICATION:


PVA 24 is a safety device for the air handling unit (AHU) protecting it against overheating. Plug connectors and installation on the 35 mm DIN-rail make service and commissioning easy. The sensor of Pt1000, Ni1000-LG or PTC1000/2000 ohm may be selected at the commissioning by coding jumpers S1...S3 on the pcb behind the front plate.

FUNCTION:

PVA 24 is monitoring and, if necessary, controlling temperature. The sensor in the duct is detecting temperature and PVA 24 is transmitting the signal to the control system. When temperature is approaching alarm set point within the range of restriction (=set point - 3 °C), the guard starts adjusting the signal of the control system to the actuator (green light). When temperature is growing higher than alarm set point PVA 24 is stopping the AHU and triggering alarm (red light). Alarm is reseted by the Reset-button or by breaking the supply voltage.

ATTENTION! Faulty sensor is triggering alarm and PVA 24 is closing the actuator (control valve) completely. The break of supply voltage of PVA 24 is stopping the air handling unit and triggering alarm.

WIRING:

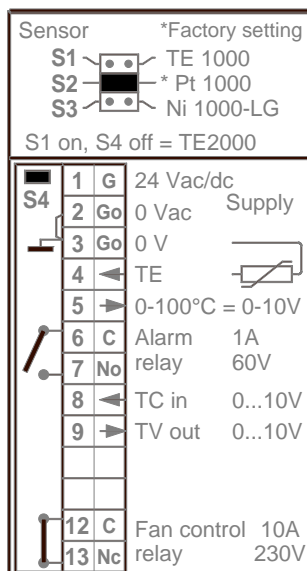

Technical data:

Supply	24 Vac/dc, 2 VA
Terminals	2,5 mm ²
Control relay, NC contact	10 A / 230 Vac
Alarm relay, NO contact	1 A / 60 V
Sensor type	selectable, factory setting Pt1000 +40... +70°C
Alarm setting	3° C < alarm set point
Start point of adjusting (fixed)	2° C
P-band (fixed)	0...100°C = 0...10 V
Air temperature output	0...10Vdc
Master controller signal (TC in)	0...10Vdc
Actuator signal (TV out)	0...10Vdc
Dimensions (w x h x d)	53 x 90 x 60,5 mm

Ordering guide:

Model	Product number	Description
PVA 24	1110180	Fire alarm thermostat fixed P-band, sensor type selectable (Pt1000, Ni1000-LG or PTC 1000/2000,)
TEK Pt1000	1174040	Pt1000 sensor
TEK Ni1000-LG	1178040	Ni1000-LG sensor

Product fulfill the requirements of directives 73/23/EEC and 2004/108/EY and is in accordance with the standards EN60730, EN61000-6-3: 2001 (Emission) and EN61000-6-2: 2001 (Immunity).

Produal Oy

Keltakalliontie 18
48770 Kotka
FINLAND
www.produal.com

Tel: +358-5-230 9200
Fax: +358-5-230 9210
info@produal.fi